

Thermoshrink 1500

FOR SMALLER PRODUCTION LINES
& BREWERIES

PERFECT FOR



FEATURES AND BENEFITS

- Compact hot air shrinking tunnel for tamper evident bands and full body decorative shrink labels
- Tamper evident shrinking up to 560 bottles per minute
- Full body decorative shrinking up to 400 bottles per minute
- Wrinkle Free - Directional nozzles provide an even heat distribution ensuring a smooth wrinkle free finish
- Highly reliable - Robust heating elements with burst control and inbuilt protection ensure a long life
- Energy efficient - Full hot air recirculation ensuring maximum energy efficiency
- Temperature accuracy - PID temperature controllers and thermocouples provide incredible accurate temperature setting $\pm 1\%$
- Just add power - Integrated control panel, just add electrical power and ready to run - no steam or additional services required
- Stainless steel construction, designed for food, beverage and pharmaceutical production lines



Product supplied may differ from image based on container drying requirements.

MTBF	6,624 Hrs
MTTR	2 Hrs
Efficiency	99.9
Noise Level*	<75 dB(A)

*Noise levels have been measured at a distance of 1m from the machine.

THERMOSHRINK APPLICATIONS



Type	Bottles per min	Installed power
Tamper evident band	Up to 560	24 kW
Capsule seal	Up to 480	24 kW
Full body sleeve	Up to 400	24 kW
Decorative sleeve	Up to 320	24 kW

SHRINK TUNNELS

Thermoshrink 1500

DIMENSIONAL DRAWING

TECHNICAL DATA	
Installed power	24.75 kW
Voltage	380-415 V / 50 Hz 440-480 V / 60 Hz
Phase	3
Energy Consumption	<16 kW
Current Protection	63 A (Back Up)
Nominal Current	35 A
Noise level	< 75 dB A

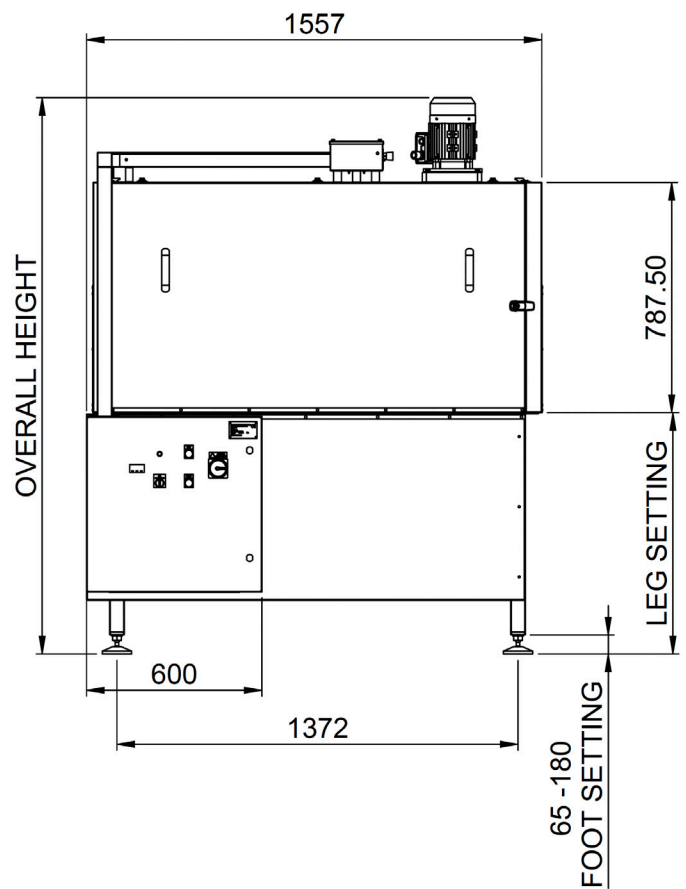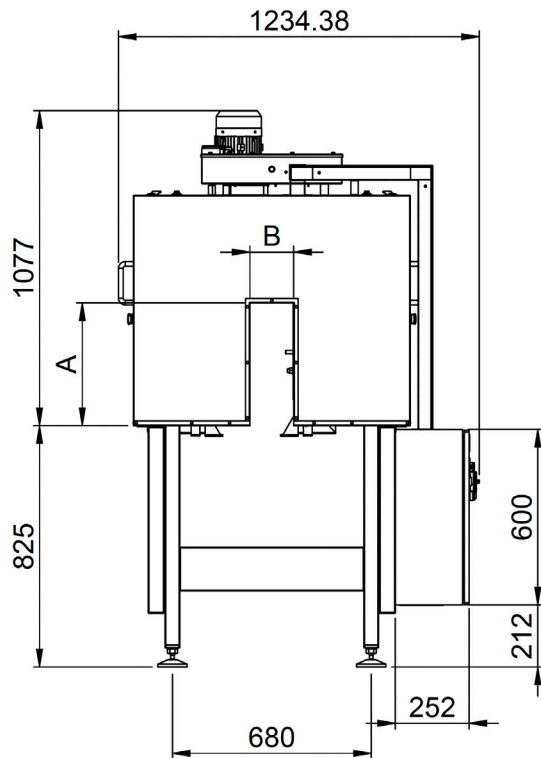

SHRINK TUNNELS

All dimensions in mm